60KVA Jewelry Spot Welding Machine , Net Basket AC Spot Welder

Our Product Introduction

Basic Information

- Place of Origin: Guangdong, China
- Brand Name: Jin Hongxiang
- Certification: CE
- Model Number: JD-60
- Minimum Order Quantity: 1 set
- Price: Negotiable
- Packaging Details: Export safety wooden case
- Delivery Time: 5-10 working days. Or negotiation
- Supply Ability: 50 Set/Sets per Month

Product Specification

- Product Name: Spot Welder
- Applicable Industries: Building Cover Plate, Railway / Road Guardrail, Pet Cage, Storage Rack, Net Basket
- Rated Capacity: 60KVA
- Usage: Welding, Multi-point Welding
- Voltage: 380V, 50HZ
- Key Selling Points: Taiwan's Water-cooled Wet Control Transformer Will Not Be Affected By Overload
- Weight (KG): 350 KG
- Control System: Touch Electric Box Control
- Cylinder Stroke: 50MM
- Nominal Frequency: 50/60HZ
- Feature: Sufficient Power, Beautiful Welding, Firm And Fast Response
- Port: Shenzhen China

for more products please visit us on wire-bendingmachine.com

you should pay attention to safety and operate in a ventilated environment.

Tooling or fixture of the machine

The spot welding machine is a row welding machine. Because of the different products, it is necessary to do some positioning tooling or fixtures for the workpiece to facilitate more suitable welding of the workpiece. These can be customized as required. The main machine remains unchanged.

Row welding die

Product Description

Performance characteristics

1. Cylinder direct pressure mechanism, good follow-up performance, fast welding speed, combined cylinder, Taiwan AS2410 large flow solenoid valve.Taiwan AS2410 solenoid valve has strong suction and sensitive response. It is ideal for continuous row welding of mesh.

2. All red copper water cooling temperature control device of transformer has the advantages of long service life, low noise, safety and convenient use.

A. Taiwan transformer features: sufficient capacity, greater welding force and stronger conductivity.
B. Water circulation cooling, which can be used within the rated range to ensure 24 hours of operation.
C. Moreover, the temperature control device can work overload and automatically cut off power to protect the whole machine from being affected.

3.The water-saving forced cooling mode is adopted, and the main circuit adopts high-power SCR contactless switch, with high conductivity and low power loss , High temperature automatic protection.

Principle of spot welding

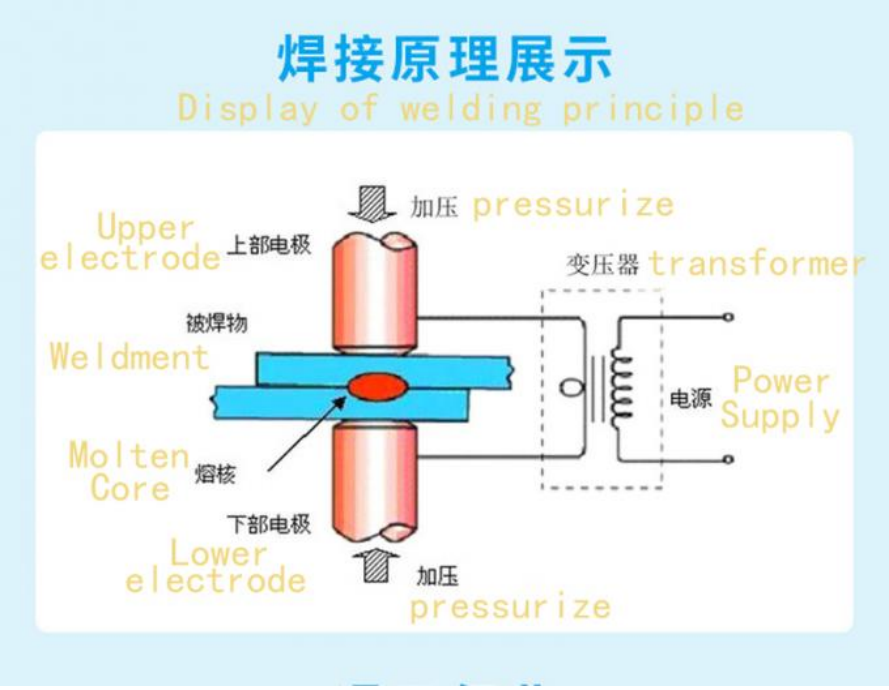

Technical parameters:

Technical parameters:								
Model	Rated power KVA	Input voltage V	Nominal frequency HZ	Maximum short circuit current A	arm length mm	ectrode travel MM	Cooling water volume	Weight KG
JD-60	60	380	50/60	22000	600	50	10	350
JD-80	80	380	50/60	28000	600	50	10	400
JD-100	100	380	50/60	30000	600	50	10	430
JD-120	120	380	50/60	32000	600	50	12	460
JD-150	150	380	50/60	34000	600	50	12	500
JDX-35	35	380	50/60	15000	400	50	/	197
JDX-50	50	380	50/60	20000	400	50	/	248

Shelf display

We always attach great importance to product quality. Before leaving the factory, it will be fully aged and debugged. And we always adhere to the principle of "providing customers with better quality, better price and better service.

Dongguan Jinghongxiang Automation Equipment Co., Ltd.

13925780098 jhx16888@gmail.com wire-bendingmachine.com

No. 78, Shangzhong Road, Shangdi Industrial Zone, Liaobu Town, Dongguan, Guangdong, China